

RPCT : REPLACEABLE PLASTIC CONICAL TIP


SPT proposes white Delrin® replaceable tips as default while black Delrin (DELB) as an option. Either material possess a very low friction coefficient while harder than conventional rubber tips. Delrin is a good material alternative when facing “sticky die” problem. SPT greatly recommends the molded Delrin sizes which are more economical and have a smoother geometry transition than machined tips, thus preventing damage to the die surface. Delrin can be used to temperature up to 135°C.

For smooth and comfortable installation or removal of the RPCT tip on cylindrical stud shank, we recommend to use SPT tight tolerance shank styles.

For other available RPCT plastic materials, consult the list on page 16.



Tip Configuration	Ø F inch / mm	Ø H inch / mm
RPCT-015/RPCT-DELB-015	.015 / 0.38	.006 / 0.15
RPCT-020/RPCT-DELB-020	.020 / 0.51	.010 / 0.25
RPCT-025/RPCT-DELB-025	.025 / 0.63	.012 / 0.30
RPCT-030/RPCT-DELB-030	.030 / 0.76	.015 / 0.38
RPCT-040/RPCT-DELB-040	.040 / 1.02	.020 / 0.51
RPCT-050/RPCT-DELB-050	.050 / 1.27	.025 / 0.64
RPCT-060/RPCT-DELB-060	.060 / 1.52	.031 / 0.79
RPCT-070/RPCT-DELB-070	.070 / 1.78	.035 / 0.89
RPCT-080/RPCT-DELB-080	.080 / 2.03	.046 / 1.17
RPCT-090/RPCT-DELB-090	.090 / 2.29	.046 / 1.17
RPCT-100/RPCT-DELB-100	.100 / 2.50	.050 / 1.27
RPCT-120/RPCT-DELB-120	.120 / 3.05	.060 / 1.52
RPCT-140/RPCT-DELB-140	.140 / 3.56	.060 / 1.52

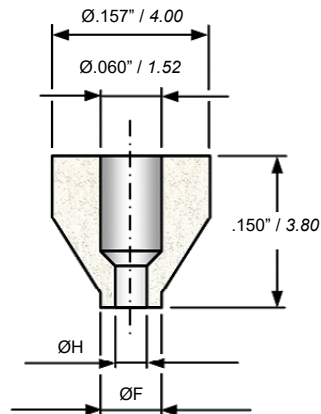

How To Order			
TIP ONLY	Tip Configuration		
	EXAMPLE:	RPCT-050	(By default material is DEL)
		RPCT-DELB-040	
		RPCT-HTV21-060	
SHANK ONLY	Shank Style & Length L	Shank /Insert Configuration	
	EXAMPLE :	2101 - .315	- RPCT Shank
		1059D	- RPCT Shank