


SPANK : SPANKING TOOL

The Spanker Tool is used on soft solder die bonding, which is required for power devices. Soft solder makes use of eutectic point between two elements : Tin/Lead, Tin/Gold. Pre-cut in reel needs to be positioned on the bond pad by pick and place machine, the tool is spanked over the adhesive to make the form, high process temperature and pressure are needed during die bonding.

Material available : W (Tungsten carbide)
 : MS (Alloy Steel)

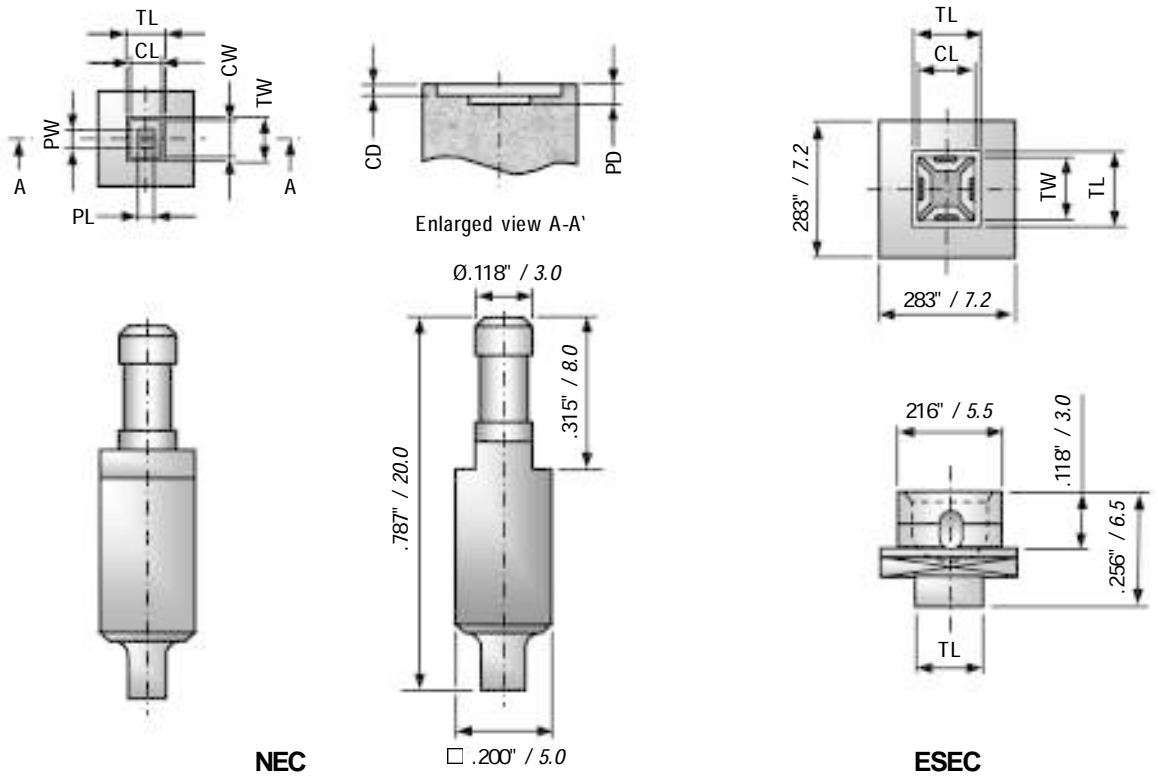

How To Order								
Tool Style	Body Style	L	Mat'l	TL x TW	CL x CW	PL x PW	CD	PD
EXAMPLE : SPANK-	NEC	-20.0	W	- 2.0 x 2.3	- 1.8 x 2.1	- 0.8 x 1.0	0.05	0.07
SPANK-	ESEC07	- 6.5	MS	- 3.8 x 3.5	- 3.5 x 3.2			

Notes : TL, CL or PL are not necessarily larger than TW, CW or PW
 For SPANK-NEC: PL, PW and PD are optional